

Model 125HS Stak-O-Veyor

Featured Benefits



- Higher stacks for less handling
- Consistent, well-jogged stacks
- Minimum hand jogging
- Self-contained AC drive package
- Caster mounted
- Compact design
- On-the-fly adjustments without tools
- All controls on face panel for easy operation
- Sturdy rugged design
- Optional count marking systems
- Optional press speed following system
- Custom conveyers to fit any press application

For use with pin and pinless double former folders.

The **Model 125HS Stak-O-Veyor** is designed to handle the output from today's high speed pin and pinless double former folders. The machine is ruggedly built to withstand the rigors of day to day use, year after year. The operator-friendly controls make set up and operations fast and simple by allowing adjustments on-the-fly.

Improved stack quality adjustments help today's publication and commercial printers improve the quality of products ultimately delivered to the bindery. Excellent stack quality is attainable even on lightweight four page signatures.

Improved AC drive motor and controller configurations provide more flexibility for moving the stackers from press to press.

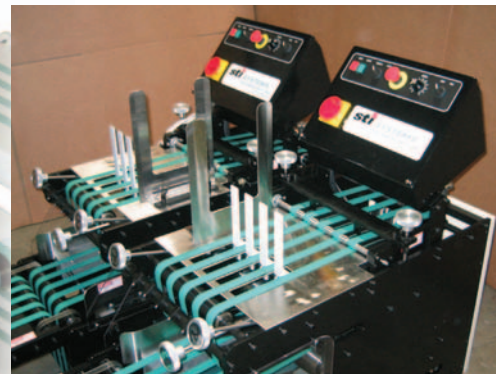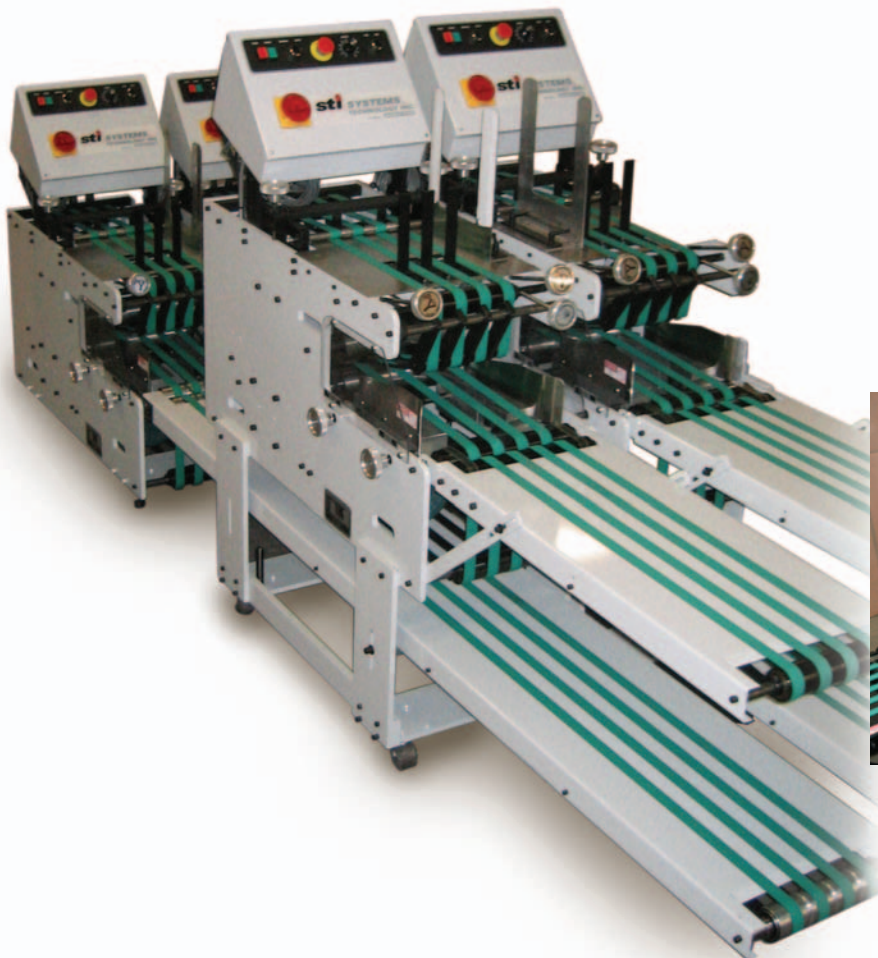


New 125HS-W wide version now available for product widths up to 12-3/4" (324mm).

Systems Technology Inc.

1351 E. Riverview Dr. • San Bernardino • CA 92408 USA • Tel: 909.799.9950 • Fax: 909.796.8297
www.systems-technology-inc.com

Model 125HS Stak-O-Veyor

TECHNICAL SPECIFICATIONS

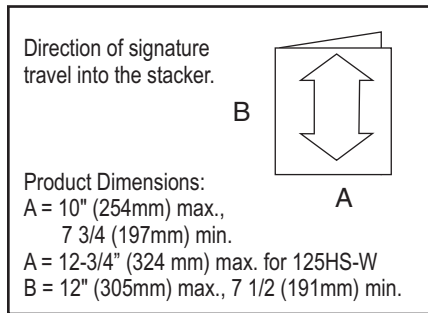


Dimensions:	12HS Stacker	Conveyor Piggyback	Sub Base Conveyor	Extensions
Length	40" (1,016mm)	116" (2,946mm)	58" (1,473mm)	36" (914mm)
Width	17" (432mm)	18" (457mm)	15" (381mm)	17" (432mm)
Height	33" (838mm)*	30-1/2" (775mm)	15-3/4" (400mm)	Adjustable

Dimensions:	12HSW Stacker	Conveyor Piggyback	Sub Base Conveyor	Extensions
Length	40" (1,016mm)	116" (2,946mm)	58" (1,473mm)	36" (914mm)
Width	20" (508mm)	20" (508mm)	17" (432mm)	17" (432mm)
Height	33" (838mm)*	30-1/2" (775mm)	15-3/4" (400mm)	Adjustable


*with casters

Electrical: 208-230VAC, 1Ph, 50/60Hz, 16A (other voltages available)

The Model 125HS Stak-O-Veyor is designed to handle magazine formatted signatures with the backbone edgewise into the stacker. On multiple delivery folders, several stackers may be configured to handle each stream independently. Typical configurations are shown below.

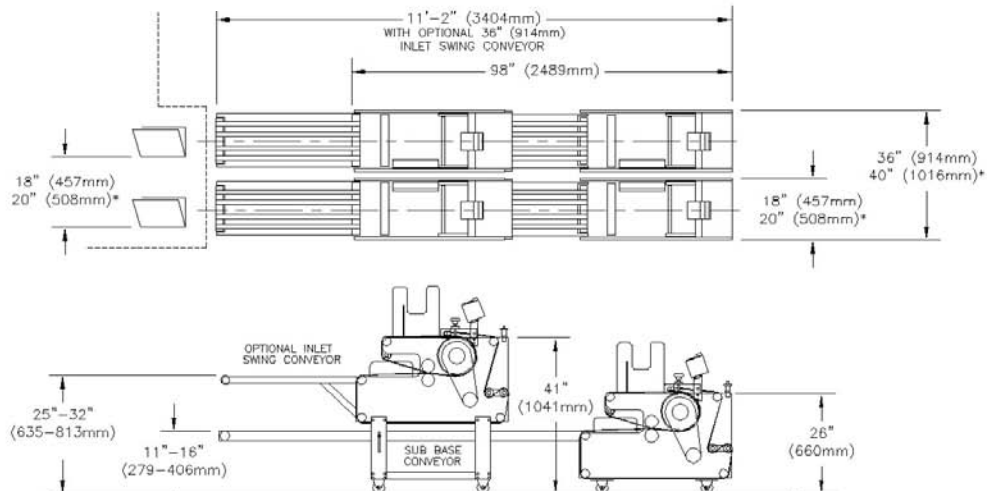

ELEVATION VIEW WITHOUT PIGGY-BACK CONVEYOR

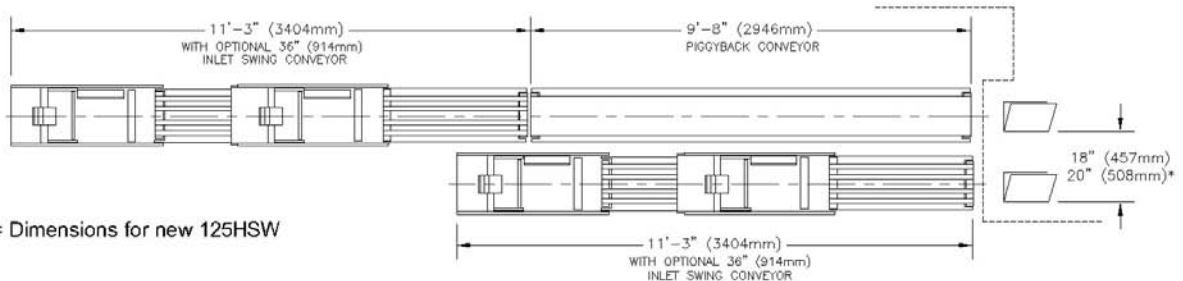

* = Dimensions for new 125HSW

Extension required for all delivery heights other than 15" (381mm) and 30" (762mm).

Systems Technology Inc. reserves the right to change specifications without notice.
 This equipment covered by U.S. and Foreign Patents and Patents applied for.